

Bolle Pendant

BTPE



MATERIALS

Hand-blown transparent borosilicate glass and hand-finished or electroplated brass

WEIGHT INCL. CANOPY

Max 4.5 lbs

POWER INPUT

110-120V 50-60Hz

LIGHT SOURCE (INCLUDED)

Proprietary Softspot75 LED, 9W, 380 Lumens, 2700K warm white. CRI>95. 75% downwards and 25% upwards



BOLLE PENDANT 04 SMALL




CONFIGURATION

STEP 1: VERSION SIZE (UNIT: IN)

Bolle Pendant 04 Small
BTPE04S


Bolle Pendant 04
BTPE04

Bolle Pendant 06
BTPE06

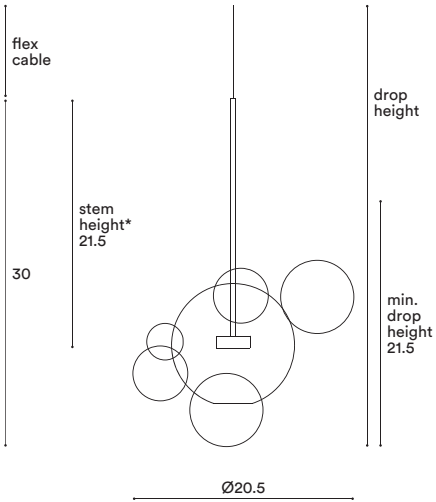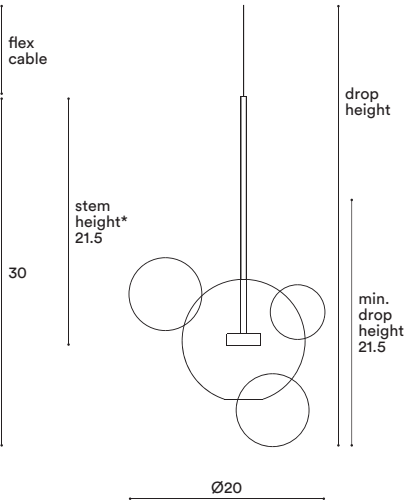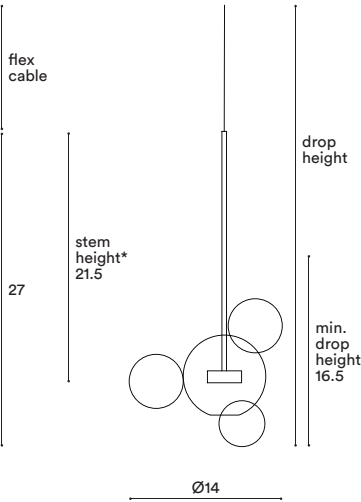

**Custom Stem Height available upon request*

STEP 2: METAL FINISHES (INCLUDED IN STARTING PRICE)

				
Brushed Brass BR	Brushed Bronze BZ	Blackened Brass BK	Brushed Nickel NK	Polished Nickel PN

STEP 3: SUSPENSION (Fabric flex cable or Metal Tube (39 in modules))

FABRIC FLEX CABLE	FINISH	DROP HEIGHT	CODE
	Black	Max 157,5 in	04B
		Max 394 in	10B
	White	Max 157,5 in	04W
		Max 394 in	10W
METAL TUBE (39 IN MODULES)	FINISH	DROP HEIGHT	SPECIFY YOUR DROP HEIGHT
	Matching Finish	16 – 39 in	000 CM
		39,5 – 78,5 in	
		79 – 118 in	
		118,5 – 157,5 in	
		up to 393,5 in	

STEP 4: CANOPY

Type of Canopy	FINISH	CODE WITH DIMMABLE STANDARD	
	1 Canopy: Ø5.5×H2 in Ceiling Type: All Driver position: Built-in	Phasecut	0-10 Volt Alternative dimming standard, if required by electrician
		Black (9005)	BL135BP
		White (9016)	WH135BP
		Brushed Brass	BR135BP
		Brushed Bronze	BZ135BP
		Blackened Brass	BK135BP
		Brushed Nickel	NK135BP
		Polished Nickel	PN135BP
			BL135BV
			WH135BV
			BR135BV
			BZ135BV
			BK135BV
			NK135BV
			PN135BV

Custom colours (RAL Classic): availability and price upon request

Bolle Chandelier Circular 14

BTCHCR14



MATERIALS

Hand-blown transparent borosilicate glass and hand-finished or electroplated brass

WEIGHT INCL. CANOPY

Max 25.5 lbs

POWER INPUT

110-120V 50-60Hz

LIGHT SOURCE (INCLUDED)

3 Proprietary Softspot75 LEDs, 27W, 1140 Lumens, 2700K warm white. CRI>95. 75% downwards and 25% upwards




BOLLE CHANDELIER CIRCULAR 14

CONFIGURATION

VERSION SIZE (UNIT: IN)

Bolle Chandelier Circular 14
BTCHCR14

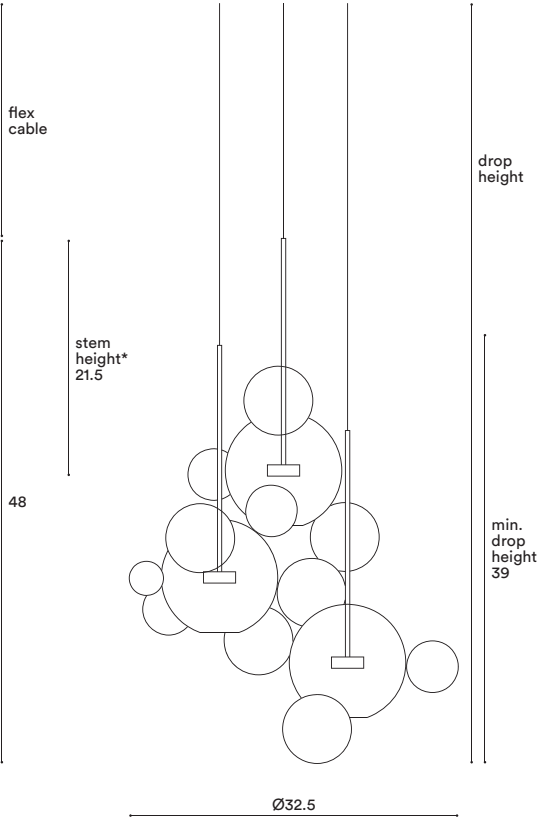

**Custom Stem Height available upon request*

STEP 1: METAL FINISHES (INCLUDED IN STARTING PRICE)

				
Brushed Brass BR	Brushed Bronze BZ	Blackened Brass BK	Brushed Nickel NK	Polished Nickel PN

STEP 2: SUSPENSION (Fabric flex cable or Metal Tube (39 in modules))

FABRIC FLEX CABLE	FINISH	DROP HEIGHT	CODE
	Black	Max 157,5 in	04B
		Max 394 in	10B
	White	Max 157,5 in	04W
		Max 394 in	10W
METAL TUBE (39 IN MODULES)	FINISH	DROP HEIGHT	SPECIFY YOUR DROP HEIGHT
	Matching Finish	39 – 78,5 in	000 CM
		79 – 118 in	
		118,5 – 157,5 in	
		158 – 197 in	
		up to 393,5 in	

STEP 3: CANOPY

Type of Canopy	FINISH	CODE WITH DIMMABLE STANDARD	
		Phasecut	0-10 Volt Alternative dimming standard, if required by electrician
	1 Canopy: Ø18xH2 in	White (9016)	WH450BP
	Driver position: Built-in	Brushed Brass	BR450BP
		Brushed Bronze	BZ450BP
		Blackened Brass	BK450BP
		Brushed Nickel	NK450BP
		Polished Nickel	PN450BP
			WH450BV
			BR450BV
			BZ450BV
			BK450BV
			NK450BV
			PN450BV

Custom colours (RAL Classic): availability and price upon request

Bolle Chandelier Circular 24

BTCHCR24



MATERIALS

Hand-blown transparent borosilicate glass and hand-finished or electroplated brass

WEIGHT INCL. CANOPY

Max 51 lbs

POWER INPUT

110-120V 50-60Hz

LIGHT SOURCE (INCLUDED)

5 Proprietary Softspot75 LEDs, 45W, 1900 Lumens, 2700K warm white. CRI>95. 75% downwards and 25% upwards




BOLLE CHANDELIER CIRCULAR 24

CONFIGURATION

VERSION SIZE (UNIT: IN)

Bolle Chandelier Circular 24
BTCHCR24

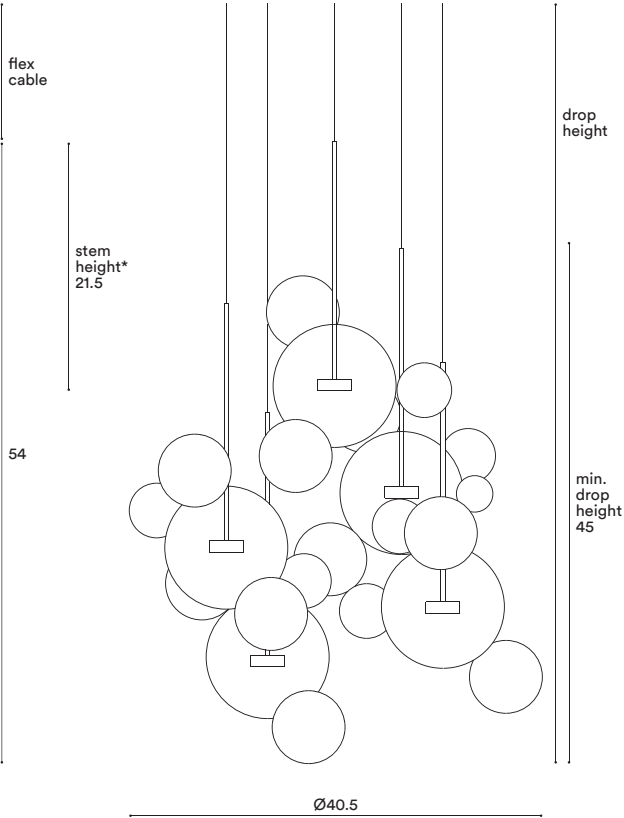

**Custom Stem Height available upon request*

STEP 1: METAL FINISHES (INCLUDED IN STARTING PRICE)

				
Brushed Brass BR	Brushed Bronze BZ	Blackened Brass BK	Brushed Nickel NK	Polished Nickel PN

STEP 2: SUSPENSION (Fabric flex cable or Metal Tube (39 in modules))

FABRIC FLEX CABLE	FINISH	DROP HEIGHT	CODE
	Black	Max 157,5 in	04B
		Max 394 in	10B
	White	Max 157,5 in	04W
		Max 394 in	10W
METAL TUBE (39 IN MODULES)	FINISH	DROP HEIGHT	SPECIFY YOUR DROP HEIGHT
	Matching Finish	44,5 – 78,5 in	000 CM
		79 – 118 in	
		118,5 – 157,5 in	
		158 – 197 in	
		up to 393,5 in	

STEP 3: CANOPY

Type of Canopy	FINISH	CODE WITH DIMMABLE STANDARD	
		Phasecut	0-10 Volt
			Alternative dimming standard, if required by electrician
	1 Canopy: Ø24,5×H2 in	White (9016)	WH620BP
	Driver position: Built-in	Brushed Brass	BR620BP
		Brushed Bronze	BZ620BP
		Blackened Brass	BK620BP
		Brushed Nickel	NK620BP
		Polished Nickel	PN620BP
			WH620BV
			BR620BV
			BZ620BV
			BK620BV
			NK620BV
			PN620BV

Custom colours (RAL Classic): availability and price upon request

Bolle Chandelier Circular 34

BTCHCR34



MATERIALS

Hand-blown transparent borosilicate glass and hand-finished or electroplated brass

WEIGHT INCL. CANOPY

Max 70.5 lbs

POWER INPUT

110-120V 50-60Hz

LIGHT SOURCE (INCLUDED)

7 Proprietary Softspot75 LEDs, 63W, 2660 Lumens, 2700K warm white. CRI>95. 75% downwards and 25% upwards




BOLLE CHANDELIER CIRCULAR 34

CONFIGURATION


VERSION SIZE (UNIT: IN)

Bolle Chandelier Circular 34
BTCHCR34

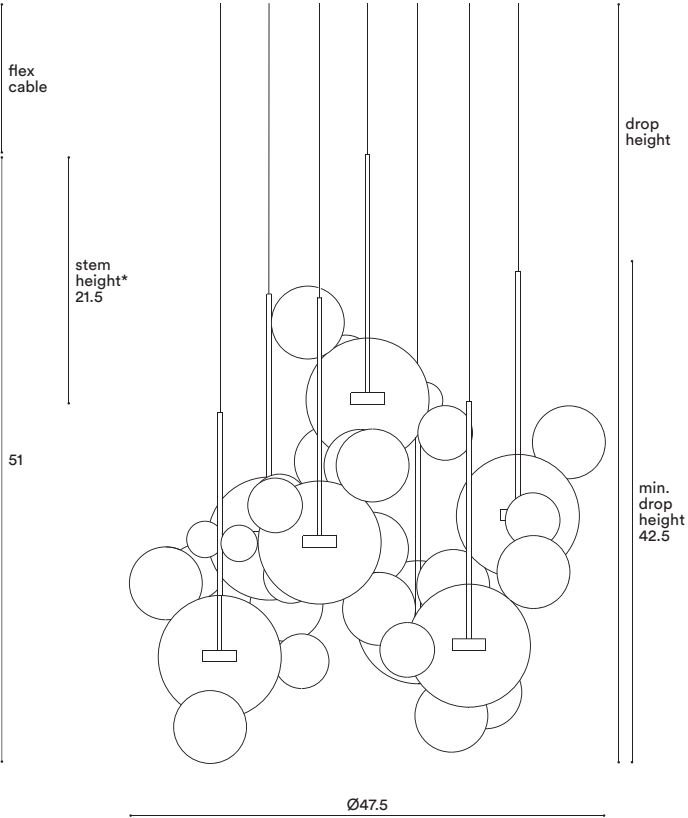

**Custom Stem Height available upon request*

STEP 1: METAL FINISHES (INCLUDED IN STARTING PRICE)

				
Brushed Brass BR	Brushed Bronze BZ	Blackened Brass BK	Brushed Nickel NK	Polished Nickel PN

STEP 2: SUSPENSION (Fabric flex cable or Metal Tube (39 in modules))

FABRIC FLEX CABLE	FINISH	DROP HEIGHT	CODE
	Black	Max 157,5 in	04B
		Max 394 in	10B
	White	Max 157,5 in	04W
		Max 394 in	10W
METAL TUBE (39 IN MODULES)	FINISH	DROP HEIGHT	SPECIFY YOUR DROP HEIGHT
	Matching Finish	42 – 78,5 in	000 CM
		79 – 118 in	
		118,5 – 157,5 in	
		158 – 197 in	
		up to 393,5 in	

STEP 3: CANOPY

Type of Canopy	FINISH	CODE WITH DIMMABLE STANDARD	
		Phasecut	0-10 Volt Alternative dimming standard, if required by electrician
	1 Canopy: Ø30×H2 in	White (9016)	WH760BP
	Driver position: Built-in	Brushed Brass	BR760BP
		Brushed Bronze	BZ760BP
		Blackened Brass	BK760BP
		Brushed Nickel	NK760BP
		Polished Nickel	PN760BP
			WH760BV
			BR760BV
			BZ760BV
			BK760BV
			NK760BV
			PN760BV

Custom colours (RAL Classic): availability and price upon request

Bolle Chandelier Linear 14

BTCHLN14



MATERIALS

Hand-blown transparent
borosilicate glass and hand-finished
or electroplated brass

WEIGHT INCL. CANOPY

Max 30 lbs

POWER INPUT

110-120V 50-60Hz

LIGHT SOURCE (INCLUDED)

3 Proprietary Softspot75 LEDs,
27W, 1140 Lumens, 2700K warm white. CRI>95.
75% downwards and 25% upwards




BOLLE CHANDELIER LINEAR 14

CONFIGURATION

VERSION SIZE (UNIT: IN)

Bolle Chandelier Linear 14
BTCHLN14

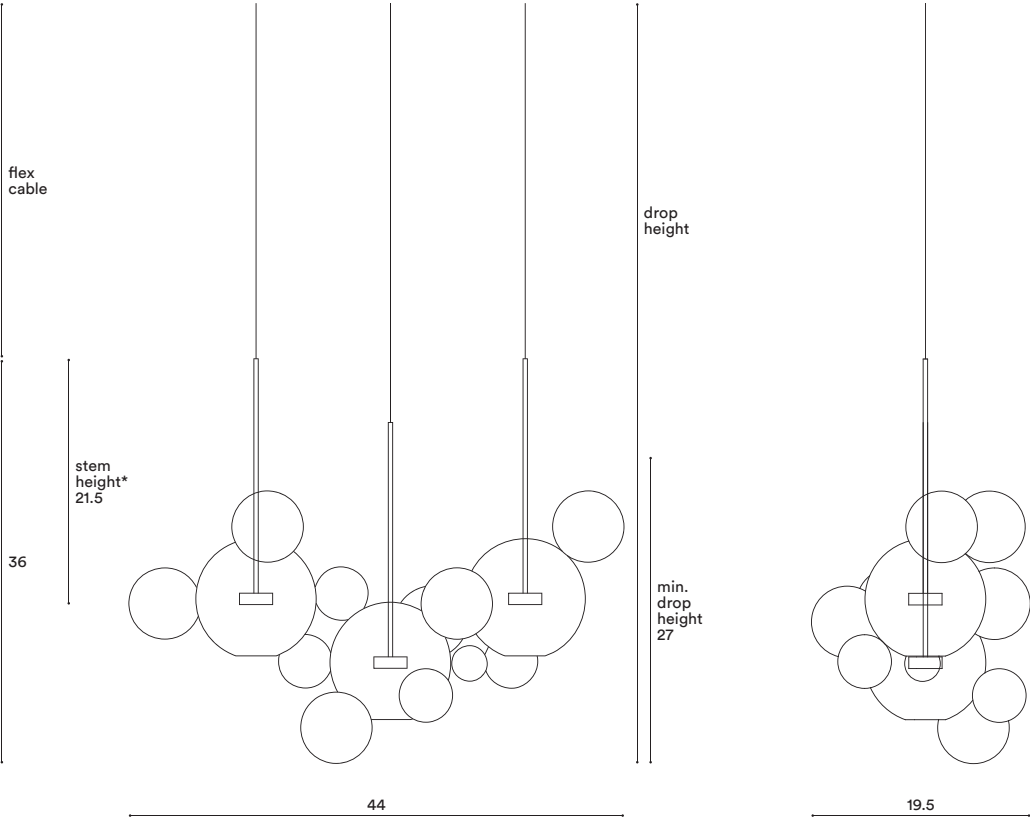

**Custom Stem Height available upon request*

STEP 1: METAL FINISHES (INCLUDED IN STARTING PRICE)

				
Brushed Brass BR	Brushed Bronze BZ	Blackened Brass BK	Brushed Nickel NK	Polished Nickel PN

STEP 2: SUSPENSION (Fabric flex cable or Metal Tube (39 in modules))

FABRIC FLEX CABLE	FINISH	DROP HEIGHT	CODE
	Black	Max 157,5 in	04B
		Max 394 in	10B
	White	Max 157,5 in	04W
		Max 394 in	10W
METAL TUBE (39 IN MODULES)	FINISH	DROP HEIGHT	SPECIFY YOUR DROP HEIGHT
	Matching Finish	26,5 – 39 in	000 CM
		39,5 – 78,5 in	
		79 – 118 in	
		118,5 – 157,5 in	
		up to 393,5 in	

STEP 3: CANOPY

Type of Canopy	FINISH	CODE WITH DIMMABLE STANDARD	
	1 Canopy: W35,5xD7xH2 in Driver position: Built-in	Phasecut	0-10 Volt
			Alternative dimming standard, if required by electrician
		White (9016)	WH900BP
		Brushed Brass	BR900BP
		Brushed Bronze	BZ900BP
		Blackened Brass	BK900BP
		Brushed Nickel	NK900BP
		Polished Nickel	PN900BP
			WH900BV
			BR900BV
			BZ900BV
			BK900BV
			NK900BV
			PN900BV

Custom colours (RAL Classic): availability and price upon request

Bolle Chandelier ZigZag 24

BTCHZZ24



MATERIALS

Hand-blown transparent
borosilicate glass and hand-finished
or electroplated brass

WEIGHT INCL. CANOPY

Max 47.5 lbs

POWER INPUT

110-120V 50-60Hz

LIGHT SOURCE (INCLUDED)

5 Proprietary Softspot75 LEDs,
45W, 1900 Lumens, 2700K warm white. CRI>95.
75% downwards and 25% upwards




BOLLE CHANDELIER ZIGZAG 24

CONFIGURATION

VERSION	SIZE (UNIT: IN)
---------	-----------------

Bolle Chandelier ZigZag 24
BTCHZZ24

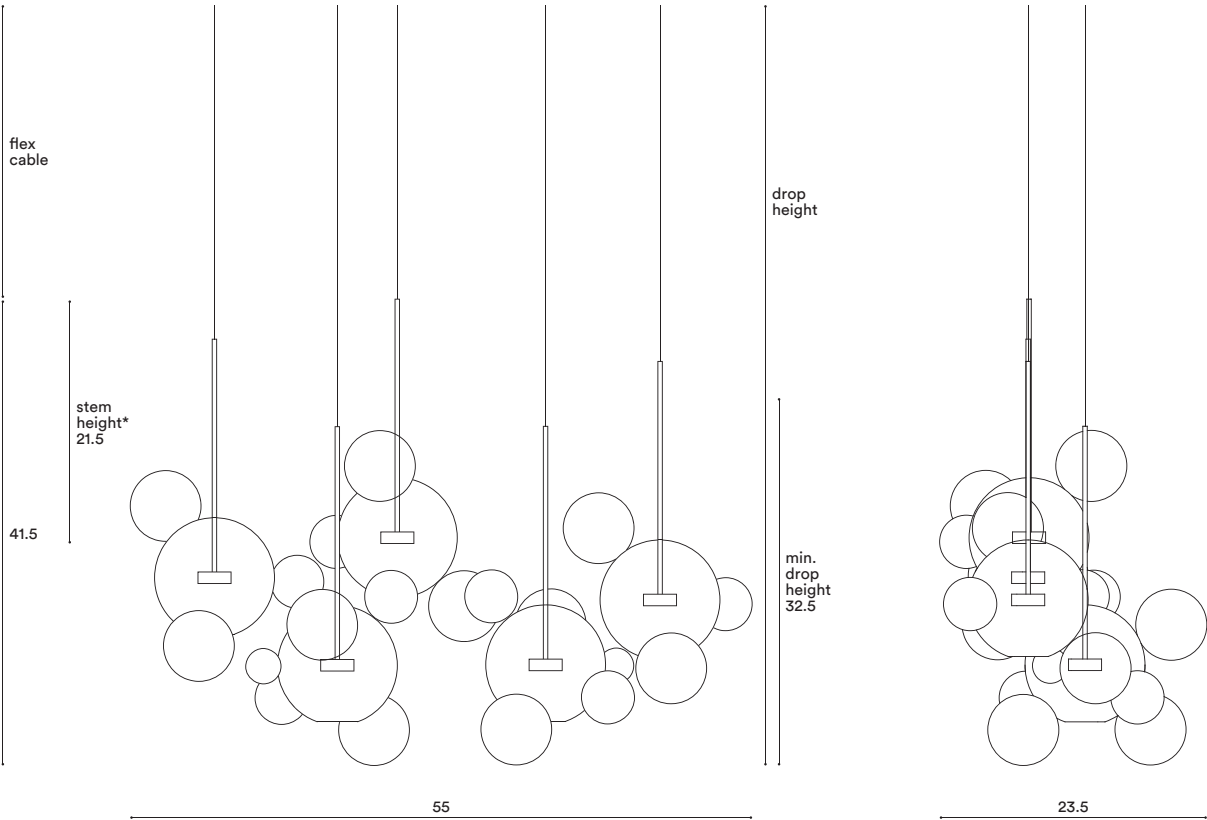

**Custom Stem Height available upon request*

STEP 1: METAL FINISHES (INCLUDED IN STARTING PRICE)

				
Brushed Brass BR	Brushed Bronze BZ	Blackened Brass BK	Brushed Nickel NK	Polished Nickel PN

STEP 2: SUSPENSION (Fabric flex cable or Metal Tube (39 in modules))

FABRIC FLEX CABLE	FINISH	DROP HEIGHT	CODE
	Black	Max 157,5 in	04B
		Max 394 in	10B
	White	Max 157,5 in	04W
		Max 394 in	10W
METAL TUBE (39 IN MODULES)	FINISH	DROP HEIGHT	SPECIFY YOUR DROP HEIGHT
	Matching Finish	32 – 39 in	000 CM
		39,5 – 78,5 in	
		79 – 118 in	
		118,5 – 157,5 in	
		up to 393,5 in	

STEP 3: CANOPY

Type of Canopy	FINISH	CODE WITH DIMMABLE STANDARD	
		Phasecut	0-10 Volt Alternative dimming standard, if required by electrician
	1 Canopy: W47xD9xH2 in Driver position: Built-in	White (9016)	WH1200BP
		Brushed Brass	BR1200BP
		Brushed Bronze	BZ1200BP
		Blackened Brass	BK1200BP
		Brushed Nickel	NK1200BP
		Polished Nickel	PN1200BP
			WH1200BV
			BR1200BV
			BZ1200BV
			BK1200BV
			NK1200BV
			PN1200BV

Custom colours (RAL Classic): availability and price upon request

Bolle Chandelier ZigZag 34

BTCHZZ34



MATERIALS

Hand-blown transparent
borosilicate glass and hand-finished
or electroplated brass

WEIGHT INCL. CANOPY

Max 75 lbs

POWER INPUT

110-120V 50-60Hz

LIGHT SOURCE (INCLUDED)


7 Proprietary Softspot75 LEDs,
63W, 2660 Lumens, 2700K warm white. CRI>95.
75% downwards and 25% upwards



BOLLE CHANDELIER ZIGZAG 34

CONFIGURATION

VERSION	SIZE (UNIT: IN)
Bolle Chandelier ZigZag 34 BTCHZZ34	

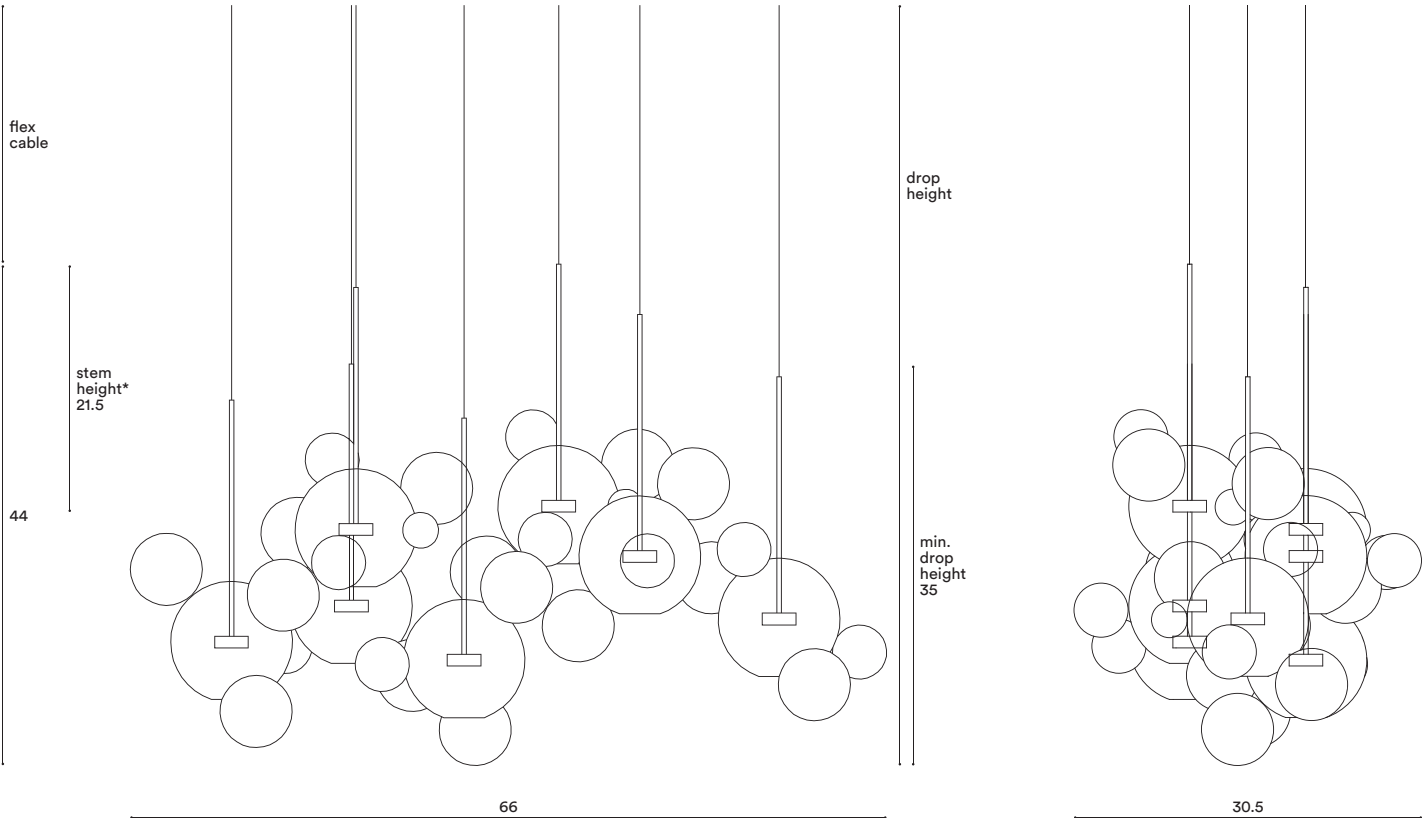

*Custom Stem Height available upon request

STEP 1: METAL FINISHES (INCLUDED IN STARTING PRICE)

				
Brushed Brass BR	Brushed Bronze BZ	Blackened Brass BK	Brushed Nickel NK	Polished Nickel PN

STEP 2: SUSPENSION (Fabric flex cable or Metal Tube (39 in modules))

FABRIC FLEX CABLE	FINISH	DROP HEIGHT	CODE
	Black	Max 157,5 in	04B
		Max 394 in	10B
	White	Max 157,5 in	04W
		Max 394 in	10W
METAL TUBE (39 IN MODULES)	FINISH	DROP HEIGHT	SPECIFY YOUR DROP HEIGHT
	Matching Finish	34,5 – 39 in	000 CM
		39,5 – 78,5 in	
		79 – 118 in	
		118,5 – 157,5 in	
		up to 393,5 in	

STEP 3: CANOPY

Type of Canopy	FINISH	CODE WITH DIMMABLE STANDARD	
		Phasecut	0-10 Volt Alternative dimming standard, if required by electrician
	1 Canopy: W54xD14xH2 in	White (9016)	WH1380BP
	Driver position: Built-in	Brushed Brass	BR1380BP
		Brushed Bronze	BZ1380BP
		Blackened Brass	BK1380BP
		Brushed Nickel	NK1380BP
		Polished Nickel	PN1380BP
			WH1380BV
			BR1380BV
			BZ1380BV
			BK1380BV
			NK1380BV
			PN1380BV

Custom colours (RAL Classic): availability and price upon request